

# BRIDGEMAN

## ER SERIES TL-15 SAFES



### ER Series TL-15 Safes




Model	Exterior H x W x D (in)	Interior H x W x D (in)	Weight (lbs)
ER-2426RC*	24 x 26 x 24	22 x 24 x 20	750
ER-3026RC*	30 x 26 x 24	28 x 24 x 20	875
ER-3838	38 x 38 x 31	36 x 36 x 26	1,400
ER-4638	46 x 38 x 31	44 x 36 x 26	1,525
ER-5438	54 x 38 x 31	52 x 36 x 26	1,840
ER-7438	74 x 38 x 31	72 x 36 x 26	2,800

\*RC refers to receiving chests for night depositories.

#### Door Swing Dimensions

Model	Dimensions (in)		
	A	B	C
ER-2426RC	24	49 3/4	51 1/8
ER-3026RC	24	49 3/4	51 1/8
ER-3838	36	68 3/4	75 1/4
ER-4638	36	68 3/4	75 1/4
ER-5438	36	68 3/4	75 1/4
ER-7438	36	68 3/4	75 1/4

#### Door Swing Projections

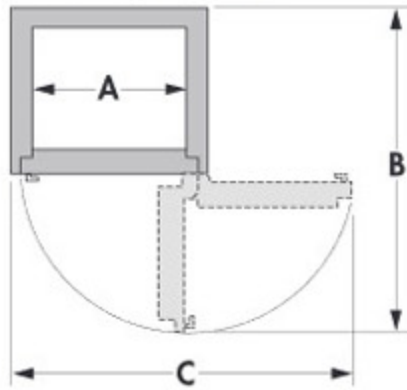

### Bridgeman ER Series TL-15 Safes

#### Advanced design, rugged construction, improved security

Bridgeman Security is proud to present a new generation of Underwriters Laboratories listed TL-15 burglary resistive safes. This sophisticated safe has many advanced design features not found on other safes in this class, and offers excellent protection against a concentrated burglary attack.

All chests are equipped with a U.L. listed Group 2M, key change combination lock. The combination dial and ring are finished in satin nickel, and are furnished in a key locking dial configuration for dual control. A two movement time lock, alarm package, and various electronic locks are available as an option.

All safes are designed with adjustable hinges, that not only offer adjustable hinge pins, but the hinge block on the door is bolted, not welded, offering endless adjustment on the door.

The safes are designed to accept an almost endless combination of our safe deposit boxes and teller lockers which will eliminate the need, cost, and time to construct custom interiors. All safes are available in right or left hand swing.

All specifications are approximate and subject to change without notice.

©2007-2014 Bridgeman Security Equipment.



9452 Telephone Rd. (# 110) Ventura, CA 93004  
Phone: 805-218-6106 www.usbanksupply.com